
Christopher Farr | cloth

Fleming Technical Sheet

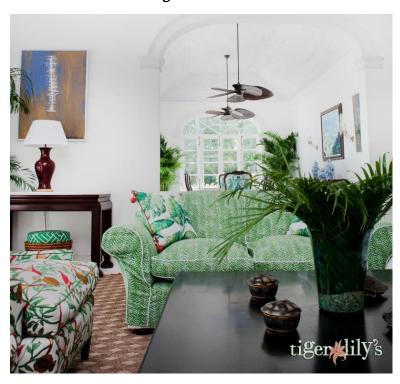

Fleming Green Upholstery, Interior Design by Tigerlily's

Composition	100% Linen / 100% Solution Dyed Polyester
Width	Linen 50.4" / 128 CM Polyester 56.3" / 143 CM
Linen Pattern	Horizontal Repeat 10" / 25.6CM Vertical Repeat 12.6" / 32CM (Straight
Repeat	Match)
Polyester Pattern	Horizontal Repeat 5.9" / 14.9CM Vertical Repeat 8.4" / 21.3CM (Straight
Repeat	Match
Martindale	Linen is not suitable for upholstery / Polyester 40,000 Rubs
Roll Length	Max size 50M / 45 yard rolls (sold by linear metre / yard)
Weight	Linen 215 g/m2 Polyester 250 g/m2
Minimum order	1M / 3 Yards
Linen Maintenance	Weekly light vacuuming is desirable to remove dirt and dust particles and greatly extends the life of the fabric. Most of our prints have good resistance to being dry-cleaned in Perchloroethylene, but a spot test is recommended to ascertain temperature and purity values beforehand. Custom print on performance polyester for a more washable product.
Linen FR Rating	All printed linens are supplied untreated and untested. Fabrics made of at least 75% natural fibres can be Cigarette tested upon request to comply with Domestic Upholstery regulations when covered with a barrier cloth (schedule 3 interliner)
Polyester	Machine washable at 30C. Do not twist or wring. Do not steam iron.
Maintenance	Iron on reverse only.
Polyester Fire	Class I anti-flame according to UNI 9176, BI in Germany and MI in
Rating	France, NFPA 701-10, NFPA 260 and UFAC in Class 1.
Commodity Code	Linen 5309111000 / Polyester 55121910
Country of Origin	Linen UK / Polyester Italy

Inquire for custom projects No minimum order on standard wallpaper, vinyl, linen, cotton or Trevira. **Custom lead time** 2-3 weeks sampling, 4-8 weeks production from receipt of 50% deposit. **Inquire for contract projects** 40 Metre minimums for Performance Polyester FR, 100 Metre minimums for ASTM Vinyl.

Contract lead time 6-8 weeks sampling, 8-10 weeks production from receipt of 50% deposit and confirmed order.

Christopher Farr | cloth

Fleming Technical Sheet

Custom Submittal Form

We thrive on creative conversations and love to be challenged, this combined with our intimate knowledge of colour, printing and weaving allows us to tackle almost any customisation project. With simple instruction on colour we can adapt the palette of a design to match any interior scheme.

Colours

We can easily alter the colours of our prints to adapt them for a particular scheme. We require guidance on colour from any source, such as fabric cutting, pantone or paint swatch references.

Base Qualities

We can alter the composition of our fabrics to make them more suitable for a given use. Whether we are printing onto a more durable ground for upholstery, Trevira or vinyl for flame retardancy, polyester for outdoor use, we apply the same care and attention.

		测	
	溪		

Fleming Design

THIS FORM MUST BE SUBMITTED WITH HARD COLOUR REFERENCES TO YOUR SHOWROOM WHO WILL PROVIDE A FORMAL QUOTE BASED ON INFORMATION PROVIDED.

)		C	2	0	/	0	L	//	n	1																																			
-	-	-	-	_				-	_	-	_	_	-	-	_	_	_	-	_	_	-	 -	-	_	-	_	-	_	_	_	_	_	_	_	_	_	_	-	_	_	-	-	_	-	_

Ground Coloui	7
---------------	---

Grouna Colour
Print to standard O
Client to submit
Design Notes (scale change / motif adjustments)
Quantity Required

Ground Options (please tick box that applies)

Non-Woven Wallpaper (White or Ivory)	Raffia Wallpaper (50 M/YD Minimums apply)
Vinyl Wallpaper (Flat or Linen	Cotton (several options available)
Emboss)	
Trevira Polyester FR (several options	Outdoor Performance Polyester FR
available)	(40 M/YD Minimums apply)
Light Linen (Ecru or Natural)	Other - please specify:
Heavy Linen (Ecru or Natural)	

Custom print on contract vinyl to meet EN 13501 B-s2, d0 + ASTM E84 Class A standards. Custom print on Performance Polyester FR to meet class I anti-flame according to UNI 9176, BI in Germany and MI in France, NFPA 701-10, NFPA 260 and UFAC in Class 1.